



iTANK MT1-B31BP

USB-C Storage for One 2.5" SATA Disk (HDD/SSD)

USB 3.2 Gen2 Type-C (10Gbps) interface, Hot-swappable disk tray,
Selectable powered by USB bus-power or DC Input.

The MT1-B31BP storage is available in two colors and features a stylish design that always looks great next to a Mac or PC. With USB 3.2 Gen2 Type-C (10Gbps) interface, it is suitable for Mac, PC and Android mobile device. In addition, the MT1-B31BP can be powered by USB Bus-power, or by DC inout (with an power adapter), you don't need to worry about insufficient power supply. The MT1-B31BP is the most user-friendly external storage with changable and hot-swappable disk tray that can be used for different data access at any time.


Features

1. USB 3.2 Gen2 Type-C interface (10Gbps)
2. Suitable for Mac, PC and Android mobile device
3. Suitable for USB and Thunderbolt™ 3 host interfaces
4. Supports one 2.5" SATA hard drive or solid-state drive(SSD)
5. Plug-and-play, no driver required
6. Hot-swappable disk tray with lock
7. LED indicator for disk status
8. With Red and Black colors
9. Aluminum chassis with high quality and fast heat dissipation



Aluminum chassis

MT1-B31BP has a sturdy and thick aluminum chassis design, and come with two colors (black/red). The aluminum chassis can withstand greater impact than plastic casing products, and it not only can provide faster heat dissipation and better protection for your disk. The faster heat dissipation also can keep your disk running normally at all times, even after long time use.

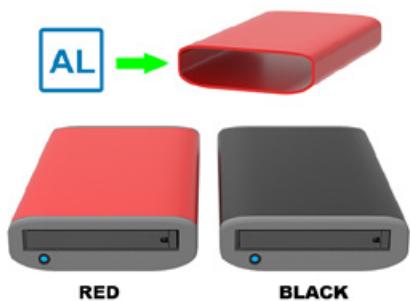

Screwless, Removable and Hot-swappable 2.5" disk tray


MT1-B31BP is equipped with an easy to install tray, can support the newest 2.5" SATA HDD/SSD, and has the sturdy aluminum housing to protect your hard disk. The MT1-B31BP combines the advantages of convenience and plug and play, can replace the tray easily and protect the hard disk securely placed and not be easily pulled out.



LED indicator for disk status

MT1-B31BP provides the LED indicator for disk status. It will flash and change when the user transmits data, and that allow users to check the disk access status quickly.



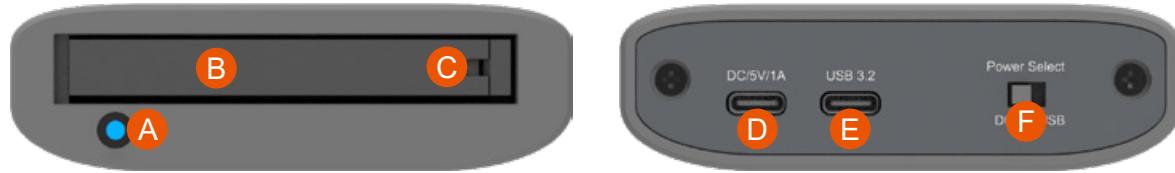

A. HDD access light
 B. HDD tray handle
 C. HDD tray ejection hole
 D. USB Type-C for Power Input
 (Power input only)
 E. USB 3.2 Gen2 Type-C (10Gbps)
 F. Power select switch

Technical Specification

MT1-B31BP	
Interface	1 x USB 3.2 Gen2 Type-C (10Gbps) 1 x USB Type-C for Power Input
Compatible Drive	1 x 2.5" SATA III (6.0 Gbps) HDD/SSD (Below Height 9.5mm)
Certification	CE/FCC
Storage Mode	JBOD - Independent Mode
Operating System Support	Windows, macOS, Linux, Android
Electrical and operating Requirements	<ul style="list-style-type: none"> Power supply: USB Bus-power or DC in (5V/1A) Frequency: 50Hz to 60Hz, single phase Operating temperature: 0° to 40° C (32° to 104° F) Storage temperature: -20° to 47° C (-4° to 116° F) Relative humidity: 5% to 95% noncondensing
Size	Height : 26.95mm Width : 90 mm Depth : 154.6 mm
Product Code	MT1-B31BP(R) EAN : 4713227440868 UPC : 884826505426 MT1-B31BP(B) EAN : 4713227440875 UPC : 884826505433
Carton	10 pcs per carton
Package Accessories	<ul style="list-style-type: none"> MT1-B31BP x 1 (with removable drive tray enclosed x 1) USB 3.2 Gen2 Type-C to Type-C Cable x 1 Quick Installation Guide x 1 Ejector pins